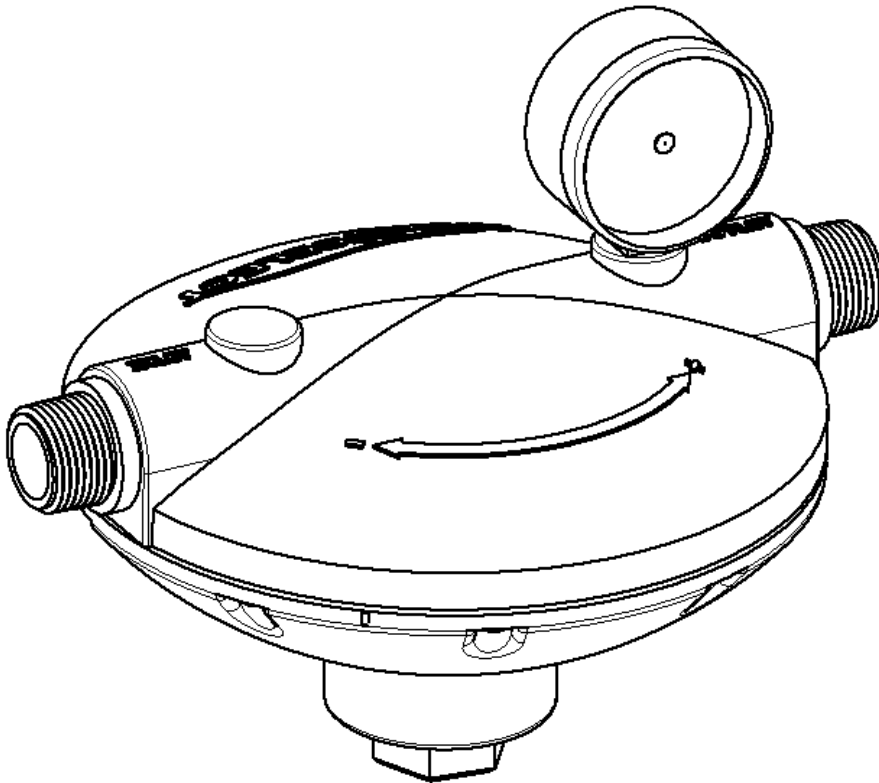


GrowerSELECT® HS762 10-25 PSI Water Regulator Installation Guide

1. Use included Teflon tape on 3/4" NPT fittings when plumbing in. Direction of flow is noted on top of the assembly by "INLET" and "OUTLET". Do not use pipe compound on the threads.
2. Use the included Teflon tape on the pressure gauge and tighten it securely to the regulator. Do not use pipe compound on the threads.

CAUTION

- INLET PRESSURE SHOULD NOT EXCEED A MAXIMUM OF 50 PSI.
- DO NOT ALLOW REGULATOR TO COME IN CONTACT WITH ALCOHOLS, PETROLEUM, OR CORROSIVE CHEMICALS.

COMPONENTS

| ITEM | PART # | DESCRIPTION |
|------|----------|------------------------------------|
| 1 | 61039 | PRESSURE GAUGE 0-30 PSI |
| 2 | HS762-14 | HOUSING TOP ASSEMBLY |
| 3 | HS762-13 | SEAL, WATER REGULATOR |
| 4 | HS762-5 | PIVOT BLOCK |
| 5 | HS762-4 | PIVOT ARM |
| 6 | HS762-6 | DIAPHRAGM BOLT |
| 7 | 11112796 | #8-16 x 1/2" STAINLESS STEEL SCREW |
| 8 | HS762-7 | DIAPHRAGM |
| 9 | HS762-3 | DIAPHRAGM PLATE |
| 10 | 60692 | NUT, NYLOC 5/16-18 STAINLESS STEEL |
| 11 | HS762-8 | SPRING |
| 12 | HS762-11 | ADJUSTMENT ASSEMBLY |
| 13 | HS762-9 | ADJUSTMENT KNOB WASHER |
| 14 | HS762-12 | REDUCER RING |
| 15 | HS762-2 | HOUSING BOTTOM |
| 16 | HS762-15 | DIAPHRAGM ASSEMBLY |
| 17 | HS762-16 | PIVOT ARM ASSEMBLY W/ SEAL |

